

AstroNova™

Profitable for Decades



Optional: Black frame designed for the certain projects and applications (e.g. residential rooftop and so on)

COMPREHENSIVE CERTIFICATES



First solar company which passed the TUV Nord IEC/TS 62941 certification audit.

275W~290W


5BB-Monocrystalline PV Module

CHSM6610M Series

CHSM6610M/HV Series

CHSM6610M max system voltage 1000V standard

CHSM6610M/HV max system voltage 1500V standard

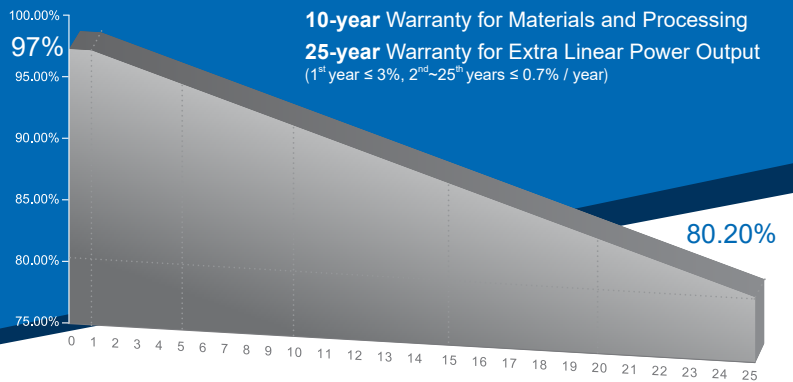

KEY FEATURES

- OUTPUT POSITIVE TOLERANCE**
 Guaranteed 0~+5W positive tolerance ensures power output reliability.
- INNOVATIONAL 5-BUSBAR CELLS**
 Reduces the cell series resistance and internal stress, decreases the risk of micro-crack and improves the module output.
- Anti PID RESISTANCE**
 Excellent PID resistance at 96 hours (@85°C /85%) test, and also can be improved to meet higher standards for the particularly harsh environment.
- EXCELLENT MECHANICAL LOAD CAPABILITY**
 Certified to withstand: snow load (6000 Pa) and wind load (3600 Pa).
- HIGHER RELIABILITY AND DURABILITY**
 Effectively deals with harsh environments, such as sand, salt mist and ammonia resistance.
- PASSED HAIL TEST**
 Certified to hail resistance: ice ball size (d=45mm) and ice ball velocity (v=30.7m/s).
- LOWER TEMPERATURE COEFFICIENT**
 Improved temperature coefficient decreases power loss in the high temperature application.

For Global Market



ASTRONERGY
A CHNT COMPANY

ELECTRICAL SPECIFICATIONS

STC rated output (P_{mpp})*	275 Wp	280 Wp	285 Wp	290 Wp
Rated voltage (V_{mpp}) at STC	31.10 V	31.48 V	31.80 V	32.15 V
Rated current (I_{mpp}) at STC	8.84 A	8.91 A	8.97 A	9.03 A
Open circuit voltage (V_{oc}) at STC	38.36 V	38.83 V	39.15 V	39.45 V
Short circuit current (I_{sc}) at STC	9.38 A	9.41 A	9.46 A	9.54 A
Module efficiency	16.8%	17.1%	17.4%	17.7%
Rated output (P_{mpp}) at NOCT	202.1 Wp	205.8 Wp	209.4 Wp	213.1 Wp
Rated voltage (V_{mpp}) at NOCT	28.64 V	28.95 V	29.27 V	29.58 V
Rated current (I_{mpp}) at NOCT	7.06 A	7.11 A	7.16 A	7.20 A
Open circuit voltage (V_{oc}) at NOCT	35.58 V	36.02 V	36.32 V	36.60 V
Short circuit current (I_{sc}) at NOCT	7.54 A	7.57 A	7.61 A	7.67 A
Temperature coefficient (P_{mpp})	- 0.380%/°C			
Temperature coefficient (I_{sc})	+0.042%/°C			
Temperature coefficient (V_{oc})	- 0.284%/°C			
Normal operating cell temperature (NOCT)	46±2°C			
Maximum system voltage (IEC/UL)	1000V _{DC} or 1500V _{DC}			
Number of diodes	3			
Junction box IP rating	IP 67			
Maximum series fuse rating	15 A			

* Measurement tolerance +/- 3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s


MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1650 x 992 x 35 mm 64.96 x 39.06 x 1.38 in
Frame technology	Aluminum, silver / black anodized
Module composition	Glass / EVA / Backsheet (white)
Front glass thickness	3.2 mm / 0.13 in
① Cable length (IEC/UL)	900 mm / 35.43 in
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
② Maximum mechanical test load	6000 Pa
Fire performance (IEC/UL)	Class C (IEC) or Type 1 (UL)
Connector type (IEC/UL)	MC4 compatible



① Option: 900(+)/600(-) mm or 1000 mm for defined projects in advance.

② Refer to Astronergy Crystalline Silicon PV Module Installation Manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

MODULE DIMENSION DETAILS

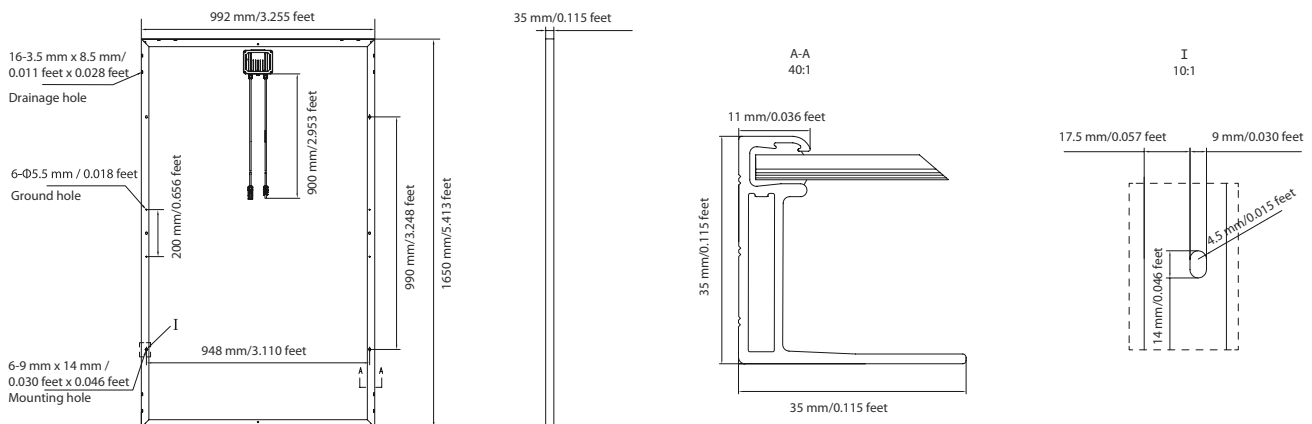

CURVE

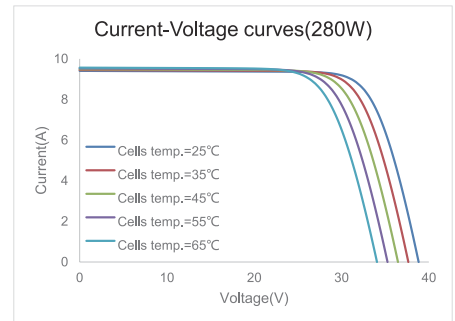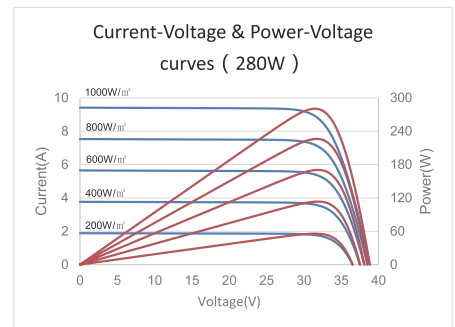

PACKING SPECIFICATIONS

① Weight (module only)	18.4 kg / 40.57 lbs
② Packing unit	31 pcs / box
Weight of packing unit (for 40'HQ container)	609 kg / 1343 lbs
Number of modules per 40'HQ container	868 pcs

① Tolerance +/- 1.0kg

② Subject to sales contract