


# Freedom Remote Control Panel

## Battery Status and Freedom Inverter/Charger Remote Control

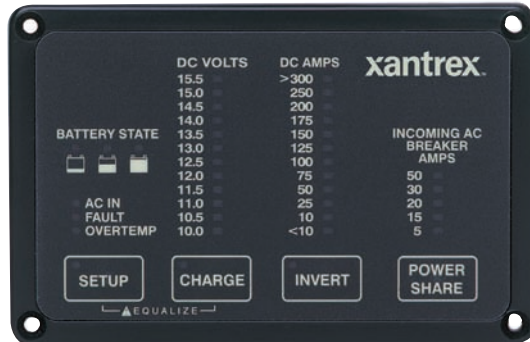

### Monitors and Controls Inverter/Charger System

The Freedom Remote Control Panel allows you to control your Freedom Combi, Freedom 458 and Freedom Marine Series Inverter/Charger system from any convenient location. With controls that can be accessed directly from the front panel, it is easy to read, operate and install.

#### Product Features

- ▶ Independent invert and charge on/off controls
- ▶ Push button control of power sharing, equalizing, battery set-up
- ▶ Multi-colored LED displays battery state of charge, fault conditions, AC input, DC voltage and DC amperage
- ▶ LED warning indicators for low battery and overload warning
- ▶ Splash resistant design
- ▶ Incoming AC breaker selection allows programmable power sharing
- ▶ Easy to install
- ▶ One year warranty

Note: The 24-volt models of Freedom Combi inverter/chargers require a different Freedom Remote.

Specifications	
<b>Voltage bar graph</b>	10.0 – 15.5 VDC
<b>DC amps bar graph</b>	Idle mode = off Loaded = <10 – 300 DC amps
<b>Operating temperature range</b>	0 – 70°C
<b>Compatible battery types</b>	wet/gel/AGM
<b>Design</b>	Splash resistant
<b>Dimensions (L x W x D)</b>	5.75 x 3.75 x 1.75" (146 X 95 X 25 mm)
<b>Cutout size (W x H)</b>	4.875 x 2.875" (116 X 73 mm)
<b>Weight</b>	3 oz (85 g)
<b>Warranty</b>	One year
<b>Part number</b>	84-2056-01

Note: Specifications subject to change without notice.

### Xantrex Technology Inc.

Headquarters  
 8999 Nelson Way  
 Burnaby, British Columbia  
 Canada V5A 4B5  
 800 670 0707 Toll Free  
 604 420 1591 Fax

5916 195th Street NE  
 Arlington, Washington  
 USA 98223  
 800 446 6180 Toll Free  
 360 925 5144 Fax